

P6 & (P6i)

Omega Corps



Description; Versatile, Small & Compact enclosure designed for use as a near field fill system or stand alone system in small applications. The Omega UP6 contains one Integral Omega crossover, 14-gauge foam lined grill, Texture finish, Long Excursion 6" woofer with 1-high frequency ribbon, & integral corner bracing with bolt thru fly points upon request.

Specifications

System Configuration	2-Way (passive 2-way Omega Network)
Loading	1-6" Low Freq & 1 Ribbon High Freq device
Connections	Barrier Strip for "I models" Production Models contain 2 rear mounted NL4
Power Recommendation-Low Frequency	300 watts @ 8-ohms recommended
Power Recommendation -Mid/High Frequency	N/A
Dispersion	See Page 2
Processing	Not required but recommended


Physical

Dimensions Height	16.00"h
Dimensions Width	8.00"w
Dimension Depth	9.00"d
Weight	16.1lbs
Construction	5/8 Baltic Birch/Dado joints



P6 Page1

Horizontal Response P6

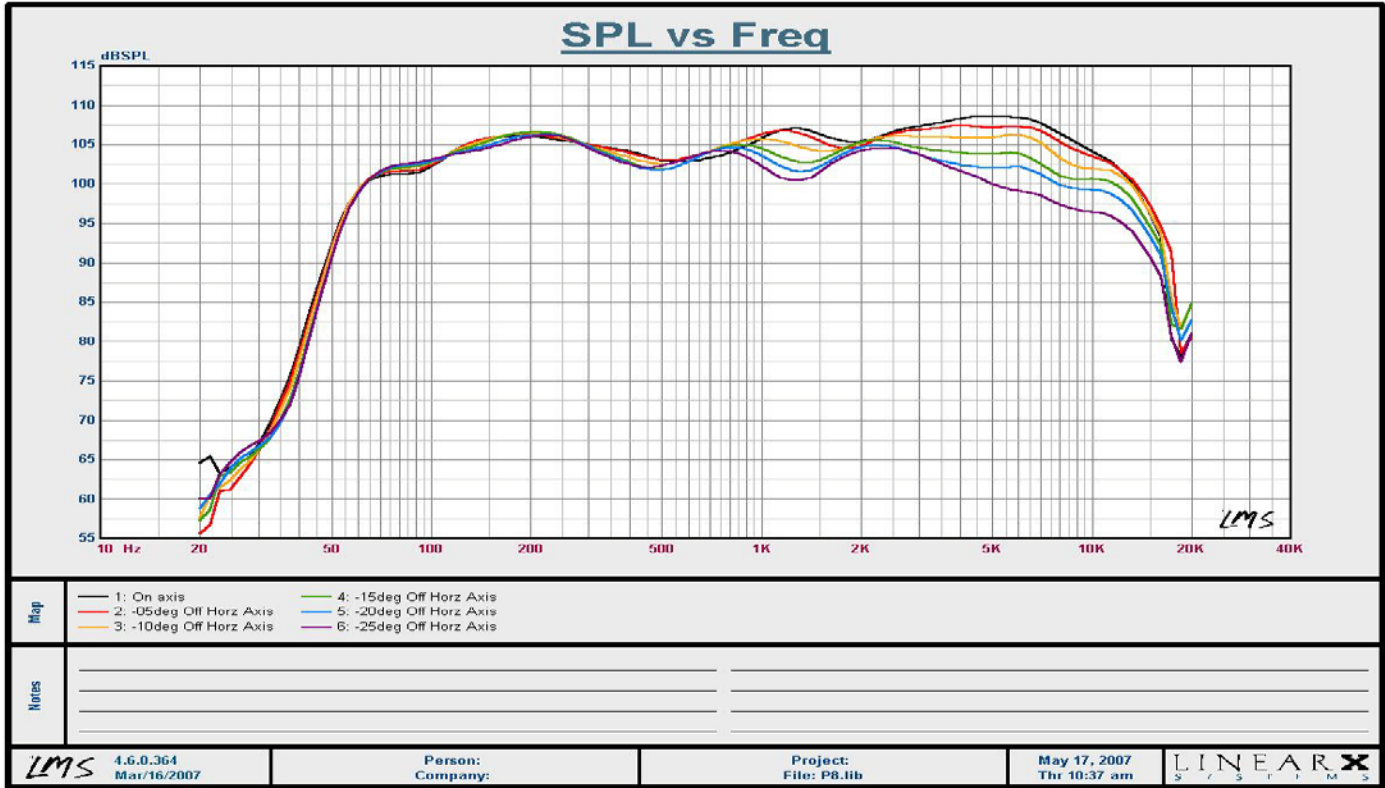

Vertical Response P6

