P8 & P8i





Description; Versatile, Small & Compact, high output enclosure, designed for use as a near field fill or stand alone system in small applications. Contains one Integral Omega crossover, 14-gauge foam lined grill, Texture finish Integral corner bracing with bolt thru fly points (upon request).

Specifications	
System Configuration	2-Way (passive 2-way Omega Network)
Loading	1-8" Low Freq/1-1"(2"VC) compression device
Connections	"I models contain Barrier Strip /Production models contain 2-rear mounted NL4
Power Recommendation-Low Frequency	800 watts @ 8-ohms recommended
Power Recommendation -Mid/High Frequency	N/A
Dispersion	See Page 2

Processing
Physical

Dimensions Height
Dimensions Width
Dimension Depth
Dimension Depth
Veight
Solution
Solutio








P8 Page1

Horizontal Response P8

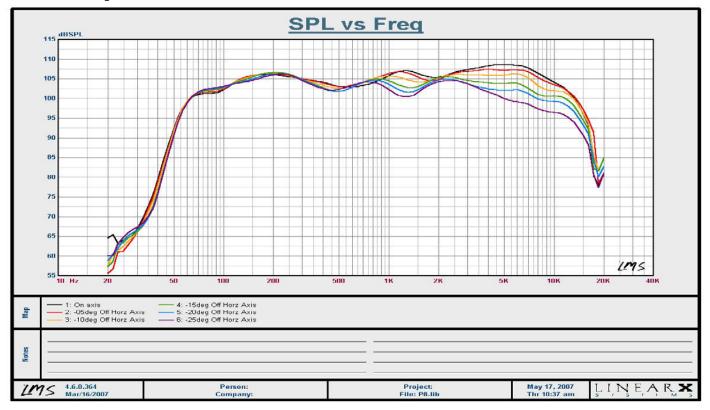

Vertical Response P8

