

P8M & P8mi

Omega Corps



Description; Versatile, Small, Compact, high output enclosure, designed for Utility use as a near field monitor system and for production fill applications. Contains one Integral Omega crossover, 14-gauge foam lined grills & Texture finish. The Omega UP8m features fly track handle, pole cup/handle, plastic protection skirts, Omega loop thru connections enabling 2 mixes to be ran thru one single NL4 or a total of 8 enclosures to be ran from one NL4 connection & can be combined with U18 Sub enclosure for additional low freq. response.

Specifications

System Configuration	2-Way (passive 2-way Omega Network)
Loading	1-8" Low Freq/1-1"(2"VC) compression device
Connections	3-Plates 7-NL4 connections with loop thru capability
Power Recommendation-Low Frequency	800 watts @ 8-ohms recommended
Power Recommendation -Mid/High Frequency	N/A
Dispersion	See Page 2
Processing	Not required but recommended


Physical

Dimensions Height	18.125"
Dimensions Width	10.00"
Dimension Depth	11.00"
Weight	32.00lbs
Construction	5/8 Baltic Birch/Dado joints



P8m Page1

Horizontal Response P8m

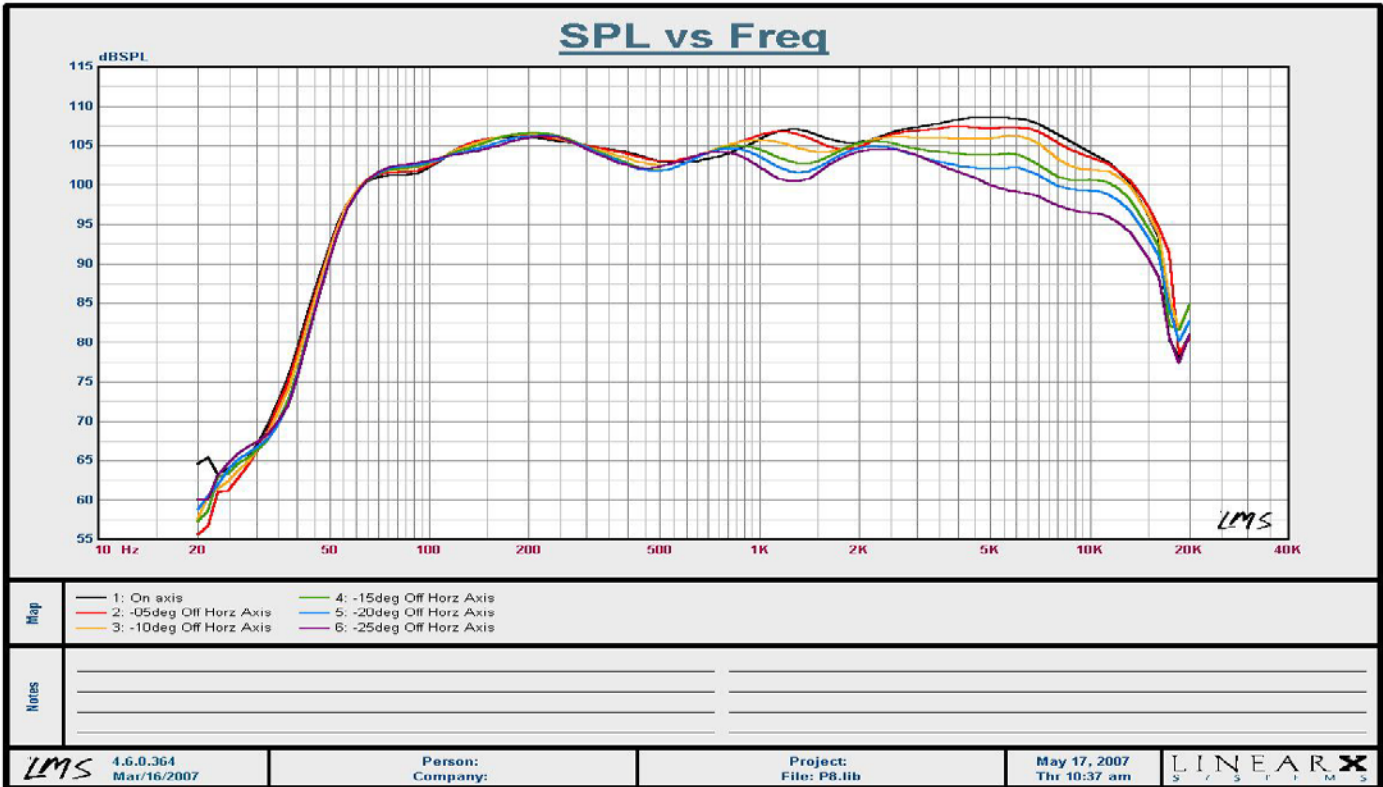

Vertical Response P8m

