

# U12E & U12Ei

## Omega Corps




**Description;** Versatile, Economical, enclosure, designed for Utility use as a near field stage monitor or for short throw FOH applications. Can be flown (Installation model only) or pole mounted. Dual jacks on rear, dual jacks on bottom, Recessed handle top and sides, one Integral Omega crossover, 14-gauge foam lined grill & Texture finish.

### Specifications

System Configuration	2-Way (passive 2-way Omega Network)
Loading	1-12" Low Freq/1-1"(2"VC) compression device
Connections	4-NL4 Speakon (Barrier Strip for "I" model)
Power Recommendation-Low Frequency	1000 watts @ 8-ohms recommended
Power Recommendation -Mid/High Frequency	N/A
Dispersion	See Page 2
Processing	Not Required


### Physical

Dimensions Height	22.125"
Dimensions Width	15.125"
Dimension Depth	14.625"
Weight	48lbs
Construction	¾ Baltic Birch/Dado joints

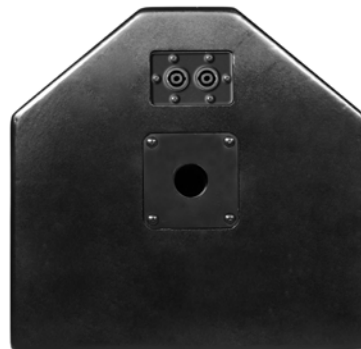

U12E Page1

## Horizontal Response U12E (i)

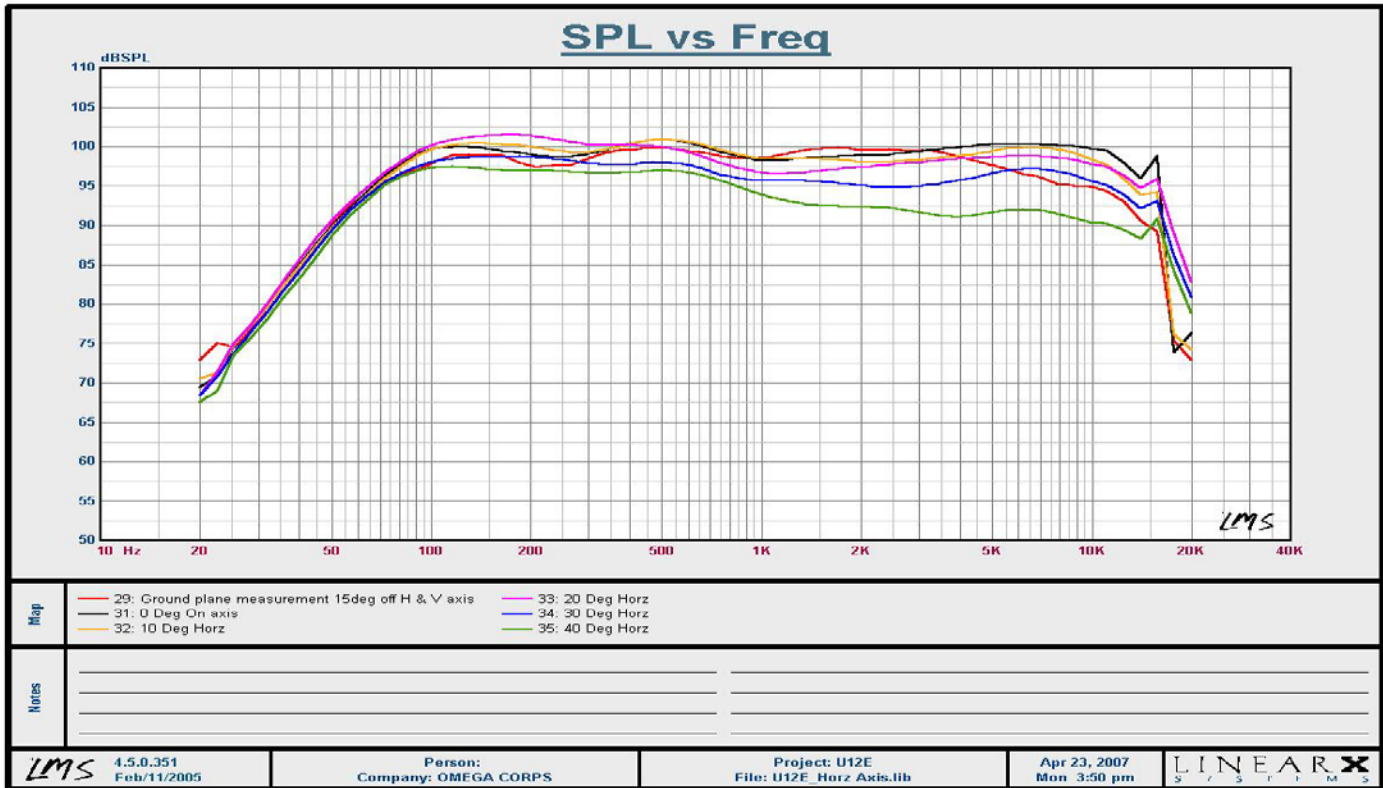

## Vertical Response U12E (i)

